


P4000 Sky | Semi-Recessed




PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

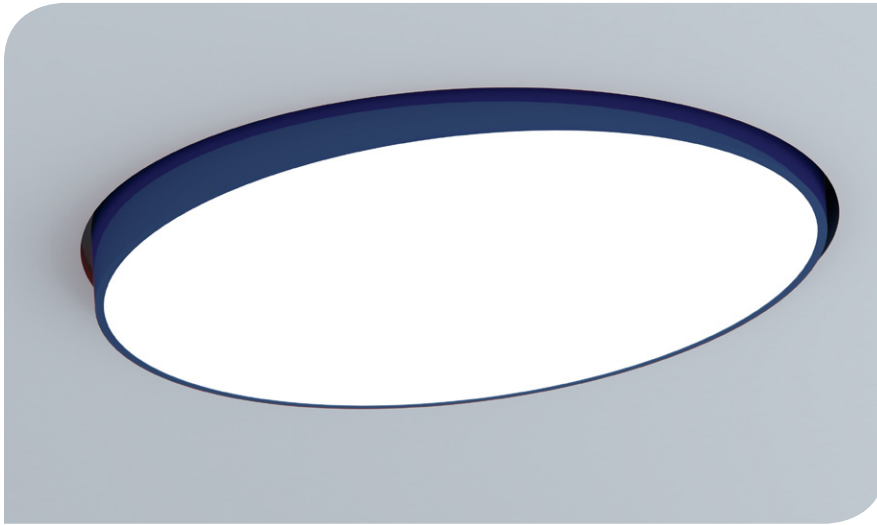

Type:

Job:

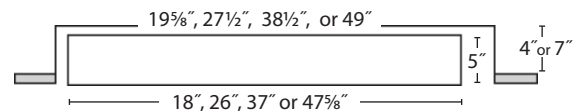

Break the plane for dramatic effect.

Another Prudential Ltg. first, merging our ever-popular P4000 pendant with a hard ceiling trimless flange. The P4000 can be tilted up to 15° for a fun, playful effect or just semi-recessed into the ceiling at different heights - easily adjustable by locking wingnuts.

P-4020-2BX39W-PRA-YGW

5700 Lamp Lumens
2964 Delivered Lumens
67 Input Watts

52%
EFFICIENCY

SERIES	LAMP ROWS	SHIELDING	COLOR/ FINISH	DISTRIBUTION	CIRCUIT- ING	VOLTAGE	MOUNTING	CEILING SYSTEMS	OPTIONS
P4018 18" dia. (11 lbs)	3Bx18w	WA White Acrylic Lens	TMW Textured Matte White	D1 Direct	SC Single Circuit	UNV (120-277)	SMR7* 7" Plenum Semi- Recessed (Standard)	X7 Hard Ceiling	EML* Emergency Battery, Low (600-700 delivered lumens) EMH* Emergency Battery, High (1100-1400 delivered lumens) 10THD*** Ballast with < 10% Total Harmonic Distortion B__ Specific Ballast (Specify Manufacturer and Catalog Number, Consult factory) BSH Longitudinal Body Sway Hanger (Stem mounting only)
P4020 2" dia. (22 lbs)	1T8U6 2Bx39w 2Bx55w	VVA Convex White Acrylic Lens (1" max drop) (Standard)	YGW Gloss White				SMR4* 4" Plenum Semi- Recessed *Hard ceiling mud over flange		DM** Dimming (Please specify requirements) FH Fixture Fusing (Slow blow) RSE*** Rapid-Start Electronic (Biax only) IBC Insulated Braided Cord *Consult factory for diameters < 4" **T8 only †NA 4018
P4030 3" dia. (35 lbs)	3T8U6 6T5 T5HO	Note: VVA lens recommended for 3" & 4" LED fixtures, lamp imaging may be visible with WA flat lens	Y__ Premium Color						
P4040 4" dia. (50 lbs)	5T8U6 7T5 T5HO		CC Custom Color	Note: Top plate is always Gloss White for optical performance					

P4000 Sky | Semi-Recessed



PHOTOMETRICS

P4020-2BX39W-PRA-YGW

Report # LSI15521


D=100.0% I=0.0%

Spacing Criteria:

Along 1.3, Across 1.3

2964 Delivered Lumens

67 Input Watts

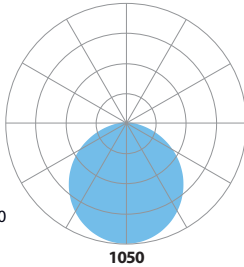

Zonal Lumen Summary:

0-90 51.95 100.00

90-180 0.00 0.00

Efficiency = 52%

Candlepower Summary

Vertical Angle	Horizontal Angle Mean CP	Output Lumens
0	1050	
5	1046	101
10	1031	
15	1008	284
20	975	
25	935	430
30	886	
35	830	518
40	767	
45	698	537
50	622	
55	542	483
60	457	
65	368	364
70	279	
75	188	199
80	104	
85	36	45
90	0	

PHOTOMETRICS

P4040-5T8U6-WA-YGW

Report # LSI15930


D=100% I=0.0%

Spacing Criteria:

Along 1.3, Across 1.3

6911 Delivered Lumens

145 Input Watts

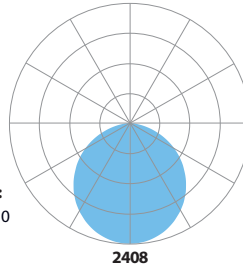

Zonal Lumen Summary:

0-90 48.44 100.00

90-180 0.00 0.00

Efficiency = 48.4%

Candlepower Summary

Vertical Angle	Horizontal Angle Mean CP	Output Lumens
0	2408	
5	2397	231
10	2367	
15	2316	653
20	2246	
25	2157	992
30	2050	
35	1928	1203
40	1786	
45	1627	1252
50	1453	
55	1275	1136
60	1079	
65	874	863
70	663	
75	447	471
80	244	
85	78	102
90	2	

ELECTRICAL

T8 and biax fixtures have instant-start electronic ballasts with less than 20% THD. T5/HO fixtures have program start electronic ballasts with less than 10% THD. Fixtures are U.L. Damp labeled and I.B.E.W. manufactured. Maximum ballast size available: 2.38" width x 1.50" height.

CONSTRUCTION

Extruded aluminum housing rolled and welded. Cold rolled steel top plate

FINISH

The standard exterior body color is gloss white (YGW).



P4000 Sky | Semi-Recessed



PRUDENTIAL LTG.

PRULITE.COM 213.746.0360


NEW YSW – Seashell White (Matte)	NEW YCH – Champagne (Metallic)
YSL – Silver (Metallic)	YPE – Pewter (Matte)
YRG – Rain Grey (Gloss)	YSTM – Storm Grey (Matte)
NEW YBK – Black (Matte)	NEW YBB – Black (Semi Gloss)
YSKM – Sky (Matte)	NEW YMB – Military Blue (Matte)
NEW YIB – Interstate Blue (Matte)	YSAM – Sapphire (Matte)
NEW YFGM – Forest Green (Matte)	YBR – Bronze (Matte)
YBY – Boysenberry (Matte)	YSRM – Sunset Red (Matte)
NEW YOR – Orange (Matte)	NEW YDAM – Daffodil (Matte)



Client: DC Comics Architect: Beckson Design Associates

INSTALLATION

- ◆ 1/4" Mounting hole
- ⊕ 7/8" Wiring K.O.

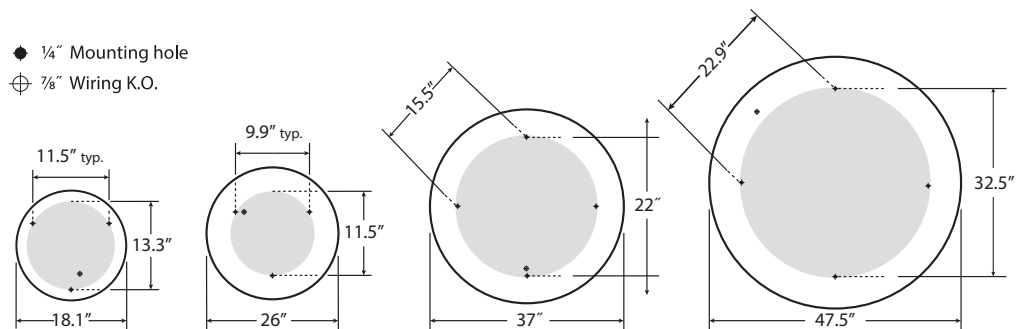


Power feed – cable mount only

Choose from one of our Premium Colors with no set-up fee.

For paint chip samples, please e-mail: info@prulite.com

MOUNTING CABLES

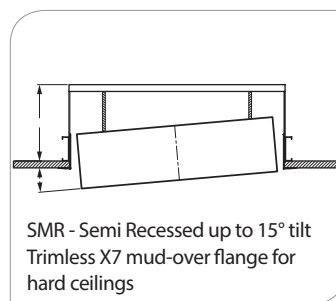

P4000 Detail



P3900 Detail



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data. © 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058