


P4000 Sky | Pendant & Surface




PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

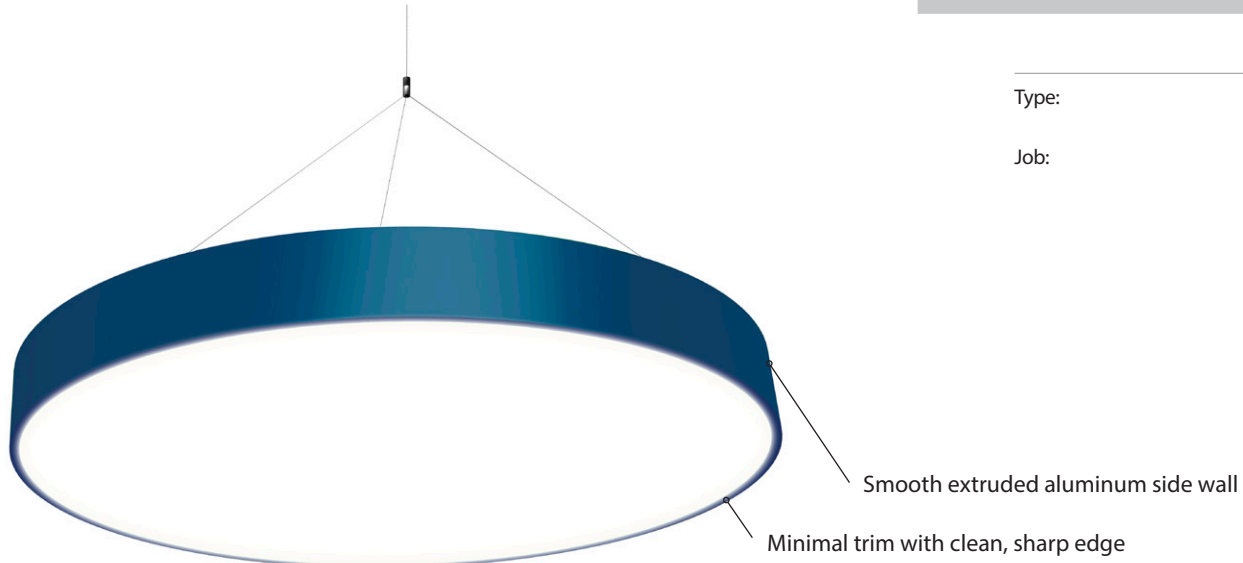

Type:

Job:



A sharper, Euro version of our P3900.

Four decades after launching our Sky Oculus P3900 we launched a sleeker, more bold and modern big round. Often specified in one of our twenty one premium colors (no set-up fee).

P4020-2BX39W-PRA-YGW
 2964 Delivered Lumens
 67 Input Watts

52%
 EFFICIENCY

SERIES	LAMP ROWS	SHIELDING	COLOR/ FINISH	DISTRIBUTION	CIRCUIT- ING	VOLTAGE	MOUNTING	CEILING SYSTEMS	OPTIONS
P4018 18" Dia. (11 lbs)	3Bx18w	PRA Prismatic Acrylic Lens	TMW Textured Matte White	D1 Direct D9 Semi-Direct (10% uplight, pendant mount only)	SC Single Circuit DC Dual Circuit	120 277 347 UNV (120-277)	SUR Surface Mount MPCA Monopoint Mounting (For 18" & 2' adj. - 9" min. from fixt. to ceiling, for 3' & 4' fixt. adj. 18" from fixt. to ceiling) CA48", 96" or 144" Aircraft Cable (Adjustable) SSC Top-Swivel Stem Mount for Hard Ceilings (Specify length in inches) NOTE: 4018 SUR or MPCA only	X1 Exposed T-Bar X3 Hard Ceiling X6 Slot Grid	EML* Emergency Battery, Low (600-700 delivered lumens) EMH* Emergency Battery, High (1100-1400 delivered lumens) 10THD*** Ballast with < 10% Total Harmonic Distortion B Specific Ballast (Specify manufacturer and catalog number) BSH Longitudinal Body Sway Hanger (Stem-mounting only)
P4020 2' Dia. (22 lbs)	1T8U6 2Bx39w 2Bx55w	WA White Acrylic Lens (Standard)	YGW Gloss White						DM† Dimming (Specify manufacturer, voltage and other requirements) FH Fixture Fusing (Slow blow) RSE*** Rapid- Start Electronic (Biax only) IBC Insulated Braided Cord *Consult factory for diameters < 4' **T8 only †N/A 4018
P4030 3' Dia. (35 lbs)	3T8U6 6T5, T5HO	VWA Convex White Acrylic (1" max drop)	Y Premium Color CC Custom Color NOTE: Top plate is always Gloss White for optical performance						
P4040 4' Dia. (50 lbs)	5T8U6 7T5 T5HO								

P4000 Sky | Pendant & Surface



PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

PHOTOMETRICS

P4020-2BX39W-PRA-YGW

Report # LSI15521


D=100.0% I=0.0%

Spacing Criteria:

Along 1.3, Across 1.3

2964 Delivered Lumens

67 Input Watts

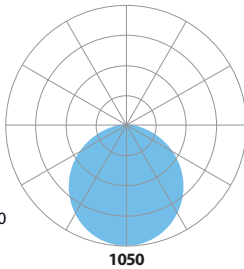

Zonal Lumen Summary:

0-90 51.95 100.00

90-180 0.00 0.00

Efficiency = 52%

Candlepower Summary

Vertical Angle	Horizontal Angle Mean CP	Output Lumens
0	1050	
5	1046	101
10	1031	
15	1008	284
20	975	
25	935	430
30	886	
35	830	518
40	767	
45	698	537
50	622	
55	542	483
60	457	
65	368	364
70	279	
75	188	199
80	104	
85	36	45
90	0	

PHOTOMETRICS

P4040-5T8U6-WA-YGW

Report # LSI15930


D=100% I=0.0%

Spacing Criteria:

Along 1.3, Across 1.3

6911 Delivered Lumens

145 Input Watts

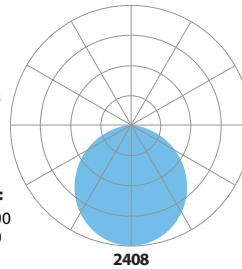

Zonal Lumen Summary:

0-90 48.44 100.00

90-180 0.00 0.00

Efficiency = 48.4%

Candlepower Summary

Vertical Angle	Horizontal Angle Mean CP	Output Lumens
0	2408	
5	2397	231
10	2367	
15	2316	653
20	2246	
25	2157	992
30	2050	
35	1928	1203
40	1786	
45	1627	1252
50	1453	
55	1275	1136
60	1079	
65	874	863
70	663	
75	447	471
80	244	
85	78	102
90	2	

FEATURES

A convex lens option, with a subtle drop that mitigates lamp image, and the unique option of 10% uplight by means of a perforated top housing is available.

CONSTRUCTION

Housing Extruded aluminum, rolled and welded, >25% PC recycled, 100% recyclable

FINISH

The standard exterior body color is gloss white (YGW) or optional textured matte white (TMW) using polyester paint. Top plate is always Gloss White for optical performance.

ELECTRICAL

T8 and biax fixtures have instant-start electronic ballasts with less than 20% THD. T5/HO fixtures have program start electronic ballasts with less than 10% THD. Fixtures are U.L. Damp labeled and I.B.E.W. manufactured. Maximum ballast size available: 2.38" width x 1.50" height.

MOUNTING

Fixture is to be suspended by straight (CA48", 96" or 144") aircraft cables, top-swivel stems or surface-mounted.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data. © 2015 All rights reserved - All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058

P4000 Sky | Pendant & Surface



PRUDENTIAL LTG.

PRULITE.COM 213.746.0360


NEW YSW – Seashell White (Matte)	NEW YCH – Champagne (Metallic)
YSL – Silver (Metallic)	YPE – Pewter (Matte)
YRG – Rain Grey (Gloss)	YSTM – Storm Grey (Matte)
NEW YBK – Black (Matte)	NEW YBB – Black (Semi Gloss)
YSKM – Sky (Matte)	NEW YMB – Military Blue (Matte)
NEW YIB – Interstate Blue (Matte)	NEW YSAM – Sapphire (Matte)
NEW YFGM – Forest Green (Matte)	NEW YBR – Bronze (Matte)
YBY – Boysenberry (Matte)	YSRM – Sunset Red (Matte)
NEW YOR – Orange (Matte)	NEW YDAM – Daffodil (Matte)



Client: Mercedes Benz. Architect: Interior Architects

MOUNTING LOCATIONS



- ◆ 1/4" Mounting hole
- ⊕ 7/8" Wiring K.O.

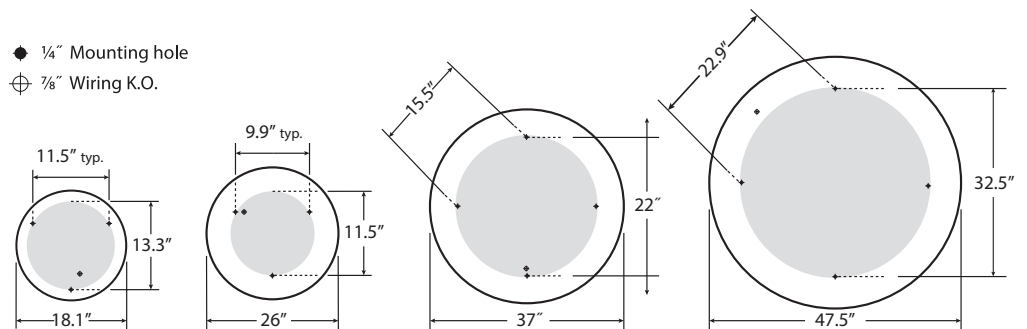

Choose from one of our Premium Colors with no set-up fee.

For paint chip samples, please e-mail: info@prulite.com

MOUNTING CABLES

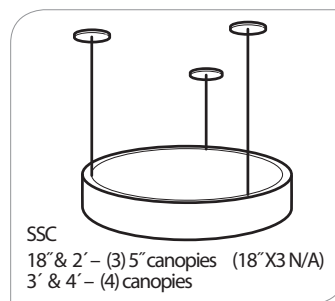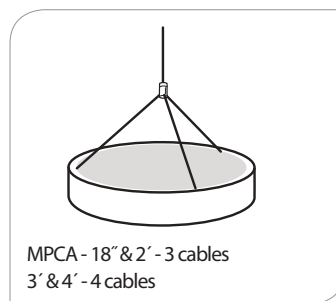

Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058