

P9000 | Recessed




PRUDENTIAL LTG.

PRULITE.COM 213.746.0360



Type:

Job:

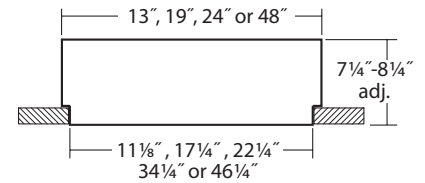

Clean, radiant, celestial, at times almost invisible.

P9000 - a slimmer, refined version of P8900 – minimal 7/16" trim or trimless with flush lens that melts into its environment. Optional drop down lens creates a playful 'bubble-like' effect.

Perfect partner to our P4000 Sky Oculus pendant.

P9018-3BX-FWA-TMW

3600	Lamp Lumens
1347	Delivered Lumens
46	Input Watts

63%
EFFICIENCY

SERIES	LAMP ROWS	SHIELDING	COLOR/FINISH	CIRCUITING	VOLTAGE	CEILING SYSTEMS	OPTIONS
P9012 12" Dia.	2CFL_w (26w, 32w, 42w) 2Bx18w	FWA Flush White Acrylic Lens	TMW Textured Matte White (Standard)	SC Single Circuit DC Dual Circuit	120 277	X1 T-Bar Exposed X3 Hard Ceiling (Flange trim)	EML Emergency Battery, Low (600-700 delivered lumens) EMH Emergency Battery, High (1100-1400 delivered lumens, consult factory for 3' or smaller fixtures)
P9018 18" Dia.	3Bx18w 1T5C or 1T9C (Circline)	DWA Drop White Acrylic Lens	YGW Gloss White Y__ Premium Color CC Custom Color		347 UNV (120-277)	X7 Hard Ceiling (Trimless mud-over flange)	10THD* Ballast with <10% Total Harmonic Distortion B__ Specific Ballast (Specify manufacturer and catalog number, consult factory)
P9020 2' Dia.	(2) T8, T8U6 2Bx_w* 3Bx_w* 4Bx_w* *Specify 39w, 40w, 50w, 55w		*Indicates color of flange for X1, X3 ceiling systems only				DM* Dimming (Please specify requirements) FH Fixture Fusing (Slow blow) RSE* Rapid-Start Electronic (T8 & biax only)
P9030 3' Dia.	(4) T8, T5/HO (6) T8, T5/HO						CP Chicago Plenum
P9040 4' Dia.	(6) T8, T5/HO (8) T8, T5/HO						*NA - 9018



PHOTOMETRICS

P9018-3BX-FWA-TMW


Report #LSI30929

D=100% I=0.0%

1347 Lamp Lumens

3600 Delivered Lumens

46.2 Input Watts



Zonal Lumen Summary:

0-90 37.41 100.00

90-180 0.00 0.00

Efficiency = 37.4%

Candlepower Summary

Vertical Angle	Horizontal Angle Mean CP	Output Lumens
0	485	
5	483	47
10	475	
15	464	131
20	447	
25	427	196
30	404	
35	376	235
40	346	
45	314	242
50	279	
55	242	216
60	204	
65	165	163
70	126	
75	87	93
80	52	
85	21	25
90	0	

FEATURES

Sleek and minimal aesthetic, it simply melts into the ceiling, flush lens with a clean and simple trim. DWA drop lens option 1.25" into room.

CONSTRUCTION

Housing Die-formed 20-gauge USA steel, >20% PC recycled, 100% recyclable

FINISH

The standard housing color is gloss white (YGW) while the standard exterior trim color is textured matte white (TMW) using polyester powder paint.

ELECTRICAL

Electrical T8 and biax fixtures have instant-start electronic ballasts with less than 20% THD. T5/HO fixtures have programmed-start electronic ballasts with less than 10% THD. Fixtures are U.L. Damp labeled (non-emergency) and I.B.E.W. manufactured. Maximum ballast size available: 2¾" width x 1½" height.

MOUNTING

Fixture is to be recess-mounted into exposed T-bar or hard ceiling application(s).






Client: GKK Works, Architect: GKK Works

MOUNTING LOCATIONS

Fixture must be installed prior to ceiling installation

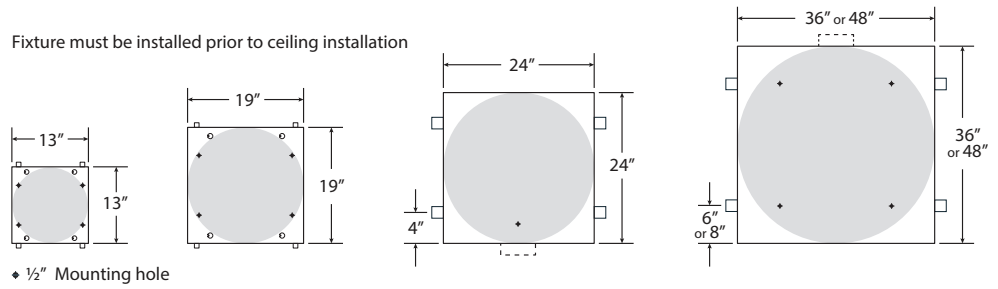

CEILING SYSTEMS

